


SIZE 8, 3-POSITION VALVE COIL INSTALLATION

Size 8 “STANDARD” Internal Frame Coil

Terminations Include:
Double Lead, Single Lead, Double Spade,
Single Spade, Single Stud, DIN, Deutsch

**Coil Washer required when
installing coils.**

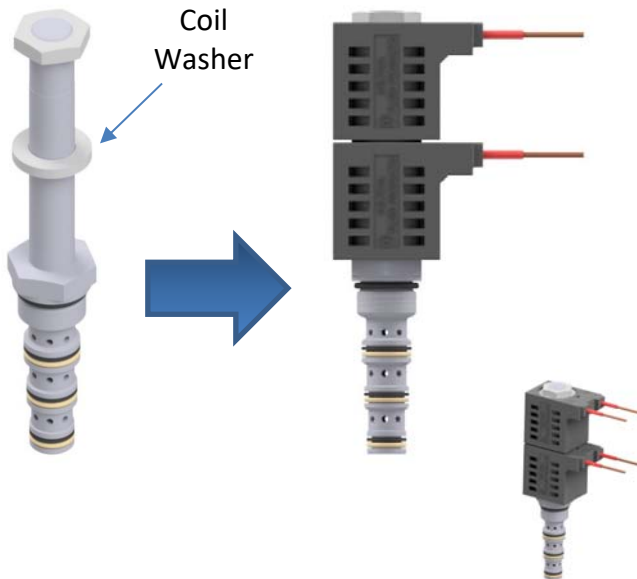

Size 8 “DREAM” External Frame Coil


Terminations Include:
Double Lead, Single Lead, Double Spade, Single
Spade, Single Stud, Deutsch,
Metri-Pack, Amp Jr Timer

**Coil Washer not required when
installing coils. Remove Coil Washer.**



Note: A coil washer installed in this configuration will still allow valve function but will result in increased coil height and reduced coil nut engagement.

For both coil styles, coils can be installed in “upside-down” or rotated configurations if required.

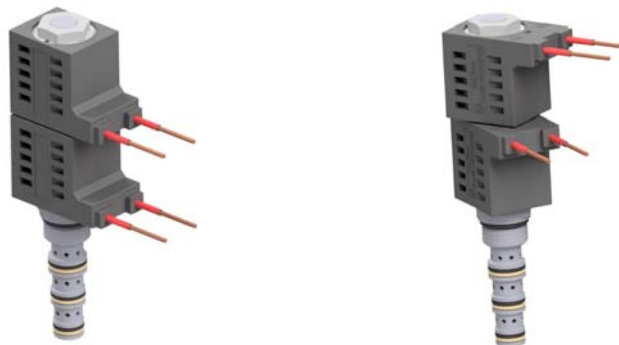

Note: When installing coil mounting nut, recommended installation torque of 40 IN.-LBS. max for both coil styles.