
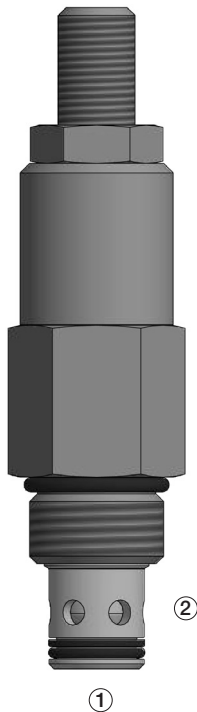


DRV-100

Adjustable,
Direct-Acting Relief Valve

SERIES 10



DESCRIPTION

An adjustable, direct-acting poppet cartridge valve designed to limit pressure in hydraulic circuits.

OPERATION

The DRV-100 prevents flow from ① to ② until the set crack pressure at ① is achieved. The poppet then unseats allowing flow from ① to ② protecting the circuit from over pressurization.

FEATURES and BENEFITS

- Rapid response to pressure surges.
- Hardened poppet and seat for long life.
- Hidden adjustment (tamper resistant) option.
- Aluminum knob and disc nut option.
- Adjustment may be locked in place.
- Adjustment prevents spring from going solid.
- Industry common cavity.

SPECIFICATIONS

Operating Pressure: 3000 psi (207 bar)

Flow: See PRESSURE DROP VS. FLOW graph.

Nominal Flow 10 gpm (37.9 lpm).

Internal Leakage: 20 drops/min max. at reseal.

Crack Pressure Defined: Determined at .25 gpm (0.9 lpm)

Reseat Pressure: Nominal 80% of crack pressure.

Spring Range: 100 to 3000 psi (7 to 207 bar)

Preset (See HOW TO ORDER)

Temperature: -30°F to +250°F (-35°C to +120°C).


Recommended Filtration: ISO 20/18/14

Fluids: Mineral-based fluids. For other fluid compatibility, consult factory.


Cavity/Cavity Tool: 100-2, see page 11.10.2

In-Line Body Material: Anodized 6061T6 aluminum
alloy rated at 3000 psi (207 bar).

PRESSURE DROP VS. FLOW

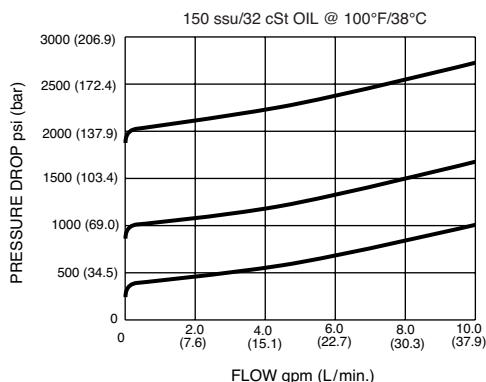

DIMENSIONS Inches [Millimeters]

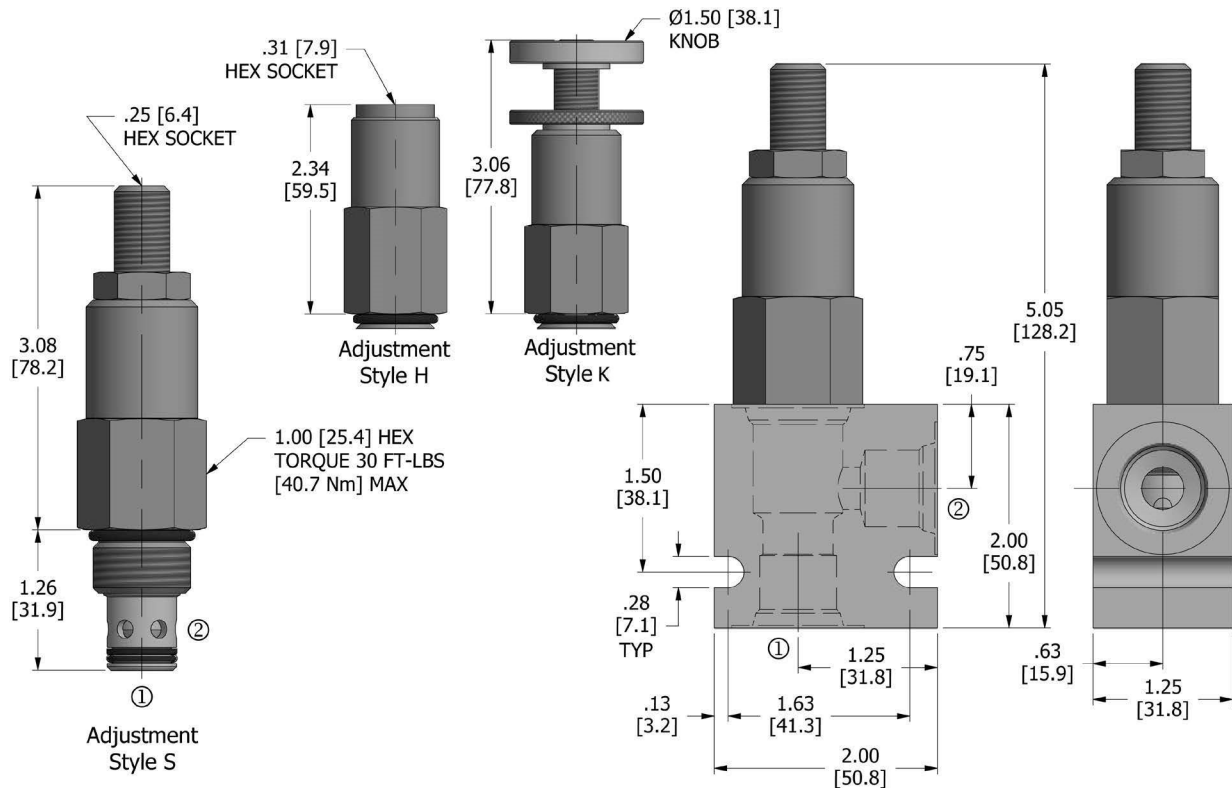

HOW TO ORDER

DRV	-	100	-	*	-	*	-	** / ****	-	**
Relief Valve		Cavity		Seals		Adjustment Style		Spring Range Factory Preset PSI		Porting

Seals		Seal Kit
N	Buna N	DSK-100-2-N-A
V	Viton	DSK-100-2-V-A

Adjustment Style	
H	Hidden
K	Knob
S	Screw

Spring Range		Preset
4	100 to 400 psi (7 to 28 bar)	300 psi (21 bar)
10	300 to 1000 psi (21 to 69 bar)	500 psi (34 bar)
20	300 to 2000 psi (21 to 138 bar)	1500 psi (103 bar)
30	1500 to 3000 psi (103 to 207 bar)	2000 psi (138 bar)

Factory Preset PSI	
omit	Standard preset
****	example: 2550 = 2550 psi

Porting†		In-Line Body w/o Cartridge
omit	Cartridge only	
2N	1/4 PTF	B-100-2-2N
3N	3/8 PTF	B-100-2-3N
6T	SAE 6	B-100-2-6T
8T	SAE 8	B-100-2-8T

† Other options available – consult factory

Valve and In-Line Body are supplied individually and need to be assembled. For a completed assembly consult the factory.

All variations may not be configurable. Minimum order quantities may be required on other models. Contact Deltrol Fluid Products for complete details.